



**brewer science**

Where innovation takes flight!<sup>SM</sup>

# Apogee™ Bake Plate

## With DataStream™ Technology

The Brewer Science® Cee® Apogee™ bake plate features a revolutionary intuitive interface, a space-saving design, and track-quality thermal accuracy and uniformity.

## BENEFITS

- New compact design for minimized footprint
- Full-color, 7-inch touch screen display
- Durable benchtop design that can be converted to a flange-/deck-mountable configuration
- Enhanced logging and optional programmable height control
- Hot plate cover that is cool to the touch, adding extra safety benefits
- Programmable exhaust
- Lift pins are now a standard inclusion
- DataStream™ technology as the standard interface

## PROGRAMMABILITY

- Touch screen interface and display
- Virtually unlimited recipe storage
- Virtually unlimited steps per program
- 0.1-s resolution for step times with a range of 0 to 9,999.9 s/step
- Three automated bake methods: contact, vacuum, proximity
- Bake plate auto-sizing for 3-inch, 100-, 125-, 150-, and 200-mm substrates
- Temperature data recording
- Electronic lift pins programmable in 0.1-mm increments with an overall range of 0 to 13 mm
- Security - password protection available at no charge

## PRECISION

- Substrate sizes: < 1 cm to 200 mm round; 8 inches x 8 inches square
- Temperature resolution: 0.1°C
- Temperature range: ambient to 300°C (400°C optional)
- Temperature uniformity: 0.3% across working surface



## DIMENSIONS

- 13.25 inches (33.65 cm) W x 19 inches (48.26 cm) D x 12 inches (30.48 cm) H
- Machine weight: 65 lb (29.5 kg)
- Shipping weight: 148 lb (67.1 kg)

## RELIABILITY


- Exceptional uptime
- 1-year full warranty on parts and labor
- Free remote technical support (phone, email, fax) for the life of the product
- Application process assistance for the life of the product

## EXHAUST BAKE HOOD DESIGN

- All-stainless-steel construction
- Exhausted hood for removal of process chemicals
- Optional nitrogen purge for inert bake environment

## UTILITIES

- Voltage ranges: 100, 110-125, 208-240 VAC
- Power requirements: 1683 watts (max) per plate
- Exhaust port: 1 inch OD
- Vacuum: 20 to 25 inches Hg
- Exhaust: 5 to 10 cfm
- N<sub>2</sub> (for bake plate proximity): 35 psi

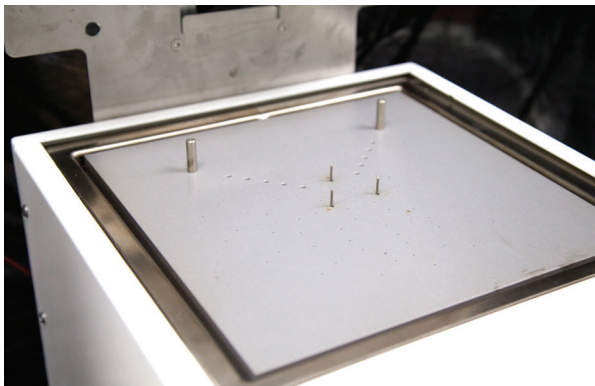

## DATASTREAM™ TECHNOLOGY: CONNECTING THE SEMICONDUCTOR INDUSTRY

Brewer Science has revamped its line of Cee® benchtop equipment and has released DataStream™ technology on its new Apogee™ tool line. DataStream™ technology gives you access to all of your connected Apogee™ manufacturing equipment in one place to track, access, and modify your systems via a website or mobile app. This technology will give manufacturers the ability to process and visualize data in real time and search and export that data into a number of different formats.

### Real-Time Process Information

- Constant feedback of process information for monitoring critical process parameters
- Streamlined interface between different tool types
- Visual cues on process status & health

### Advanced Recipe Creation

- Seamless switching between basic and advanced recipe creation methods
- Plain-English recipe translation
- Pre-defined process commands
- Unlimited process steps
- Unlimited recipe storage

### Environmental Monitoring

- Monitoring of temperature & humidity allows for stricter control of critical processes
- Set preconditions and tolerances for monitored parameters
- On-screen, colored visual cues for deviation from controlled specs

### Data Logging & Export

- Export data logs into commonly readable formats for further analysis and process troubleshooting
- Increase process efficiency
- Identify process control deviations
- Analyze multiple processes for best known method (BKM) development

© 2016 Brewer Science, Inc.

All statements, technical information, and recommendations contained herein are based on tests we believe to be accurate, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of warranty expressed or implied. Neither the seller nor the manufacturer shall be liable for any injury, loss, or damage, direct or consequential, arising from the use or inability to use the product. Before using, user shall determine the suitability of the product for his intended use, and user assumes all risk and liability whatsoever in connection therewith. No statement or recommendation contained herein shall have any force or effect unless in an agreement signed by officers of the seller and manufacturer. Effective Date: 5/4/2016